

Mecca



Lever Wall Top Assemblies

-Shallow Fit

Nero




Lead Free



Version : 202606

Drawing

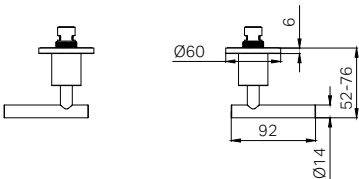

Specifications

Watermark License
WM-060073
Temperature Rating
Min 1 °C - Max 75 °C
Pressure Rating
Min 150kpa - Max 500kpa

Packing Includes

2 x Handles
2 x Plates
2 x Spindle Cartridges

Finish & SKU

Chrome 25D022CH	Matte Black 25D022MB	Brushed Nickel 25D022BN
Gun Metal 25D022GM	Brushed Gold 25D022BG	Brushed Bronze 25D022BZ
Matte White 25D022MW	Tumbled Antique Brass 25D022TA	Rome Bronze 25D022RB

*Dimensions are nominal measurements only.

INSTALLATION INSTRUCTIONS


GENERAL INFORMATION

- This product must be installed by a licensed plumber. Ensure that the installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.



NOTE

- Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation, all connections must be checked for leaks.
- This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
- If limited water flow is experienced, locate aerator and filter washers and clean away foreign material as required.
- It is the responsibility of the plumber to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall.

PARTS NAME

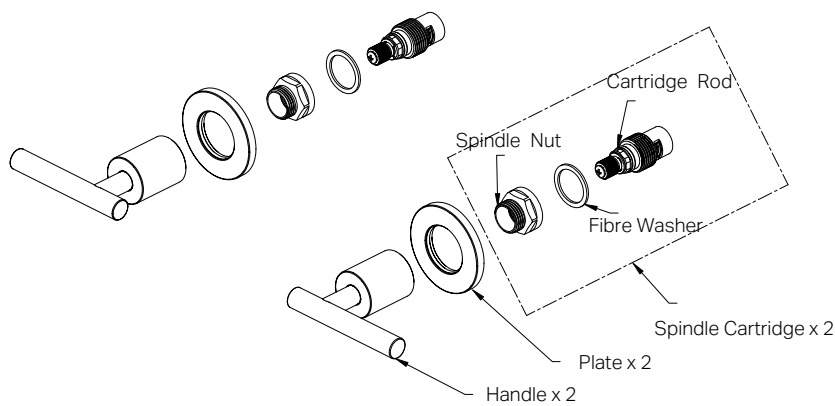

INSTALLATION STEPS

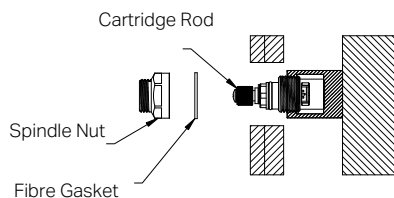


1. Before installation, ensure the distance between the breech face and the finished tile/stone/marble wall surface is 0-24mm.

2. Tighten the cartridge rods firmly into the in-wall breech with a torque wrench .
Recommend torque: 6-8 Nm.

3. Place the fibre washers onto the cartridge rods.



4. Tighten the spindle nuts onto the cartridge rods with a torque wrench.
Recommend torque: 15-18 Nm.

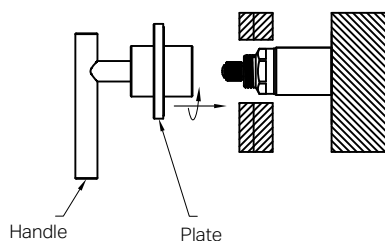

5. Insert the handle into the plate.

6. Adjust the handle direction properly, insert the handle into the cartridge rod, and tighten the handwheel while turning it.

7. Repeat steps 2 to 6, and pay attention to distinguishing the left and right handles.



8. Installation Complete (Off Position)

FINAL INSPECTION

- Ensure the product operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

MAINTENANCE AND CARE

- Regularly check the product and connections for signs of wear or leaks.
- Clean the product with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

Nero

